

#### 1 5206PRO

#### 3/8" Sq. Dr. Mini Composite Body **Soft Grip Air Impact Wrench**

Expert Quality, lower noise, low vibration twin hammer action and reverse one-hand, push button operation. Compact size and lightweight with ergonomic handle design for user comfort. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification: ... 100lb-ft (136Nm) Ultimate torque Free speed ... 11,000r/min Operating air pressure ... 90psi (6.2bar) Average air consumption 4cfm (114L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP

Weight ... 1kg Stock Box Qty each 14257 €155.73P

# (DRAPER) Expert

#### 2 5202PRO

#### 3/8" Sq. Dr. Compact Composite Body Air Impact Wrench

Expert Quality, lower noise, low vibration twin hammer action, three speed with easy forward and reverse onehand, push button operation. Compact size and lightweight with ergonomic handle design for user comfort. Rotating air inlet to prevent air lines tangling. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink effect. Display carton.

Specification:

Ultimate torque ... 200lb-ft (271Nm) ... 9000r/min Free speed Operating air pressure 90psi (6.2bar) Average air consumption ... 4.4cfm (125L/min) ... 3/8" I.D Minimum hose size Air inlet ... 1/4" BSP Weight ... 1.2kg

Stock No. each 43326 €174.63P

# **REASONS YOU SHOULD CONSIDER THE** DRAPER EXPERT AIR TOOL RANGE

These tools are designed for use in the professional workshop. With features to reduce weight, noise and vibration ensuring they are comfortable to use, yet strong enough to get the job done.

Check out the specification panels for each tool to see how hard we've worked to get them right.













#### **PAUL SAYS**

Hand Arm Vibration (HAV) is a commonly reported workplace injury. From July 2010 the daily UK Exposure Limit Value (ELV) is 5m/s² A (8). These Draper Expert air tools can help assist in reaching this demanding new legislation. For full information and guidance please visit the HSE website: www.hse.gov.uk/vibration





# Air Impact Wrench

Light duty impact wrench ideal for small fastening and engine work in confined areas. One hand forward and reverse butterfly control complete with built-in regulator. Display carton.

Specification:

Clutch type ... rocking dog ... 3/8" Bolt capacity ... 75lb-ft (102Nm) Ultimate torque Operating air pressure ... 90psi (6.2bar) Average air consumption 3.0cfm (85L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 0.9kg

Stock No. each 55110 €55.10P

#### Expert Quality, lower noise, low vibration high torque twin hammer action with easy forward and reverse one-hand operation. Rotating air inlet prevents air line tangling. The composite body makes this a lightweight

but rugged tool which reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:

Ultimate torque ... 600lb-ft (813Nm) ... 7000r/min Free speed Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.4cfm (125L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 2.2kg

Stock No. Price each 41096 €163.58P



# **Air Impact Wrench**

Quality heavy duty wrench with powerful torque from the efficient motor. Ruggedly built for reliable use. One hand easy forward and reverse direction change. Variable position power regulator for simple speed and power control. Display carton.

Specification:

Clutch type ... roller pin **Bolt capacity** ... 16mm Ultimate torque ... 280lb-ft (380Nm) Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet ... 2.4kg Weight

Stock Price each 55111 €110.15P



#### 3 4201HDKA

# 15 piece 1/2" Sq. Dr. Heavy Duty Air Impact Wrench Kit

Comprising Stock No.55111 Impact Wrench and accessories. Supplied complete in carrying case. Display

Contents: • impact wrench • 10 chrome vanadium steel impact sockets size: 9, 10, 11, 13, 14, 17, 19, 22, 24 and 27mm • chrome vanadium steel extension bar size: 125mm • 1/4" BSP nipple • mini oiler

Specification - impact wrench:

... roller pin Clutch type ... 16mm Bolt capacity Ultimate torque ... 280lb-ft (380Nm) Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet

Weight ... 2.4kg (machine only) Stock Box Qty Price No. per kit 55360 €147.93P



#### 2 4201A

#### 1/2" Sq. Dr. Air Impact Wrench

General duty impact wrench with one hand forward and reverse direction change. Built-in four position power regulator for simple speed and power control. Display carton.

Specification:

Clutch type ... rocking dog ... 16mm Bolt capacity ... 250lb-ft (339Nm) Ultimate torque Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size Air inlet ... 1/4" BSP Weight ... 2.4kg

Stock No. each 52599 €61.35P

# 15 piece 1/2" Sq. Dr. Air Impact Wrench Kit

Comprising Stock No.52599 1/2 square drive Impact Wrench and accessories. Supplied complete in carrying case. Display carton.

#### Contents

- impact wrench 10 chrome vanadium steel impact sockets size: 9, 10, 11, 13, 14, 17, 19, 22, 24 and 27mm
- chrome vanadium steel extension bar size: 125mm
- 1/4" BSP nipple mini oiler oil pot

Specification - impact wrench:

Clutch type ... rocking dog ... 16mm **Bolt capacity** Ultimate torque ... 250lb-ft (339Nm) Operating air pressure ... 90psi (6.2bar) ... 4.0cfm (114L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet

Weight ... 2.4kg (machine only) Stock No. Box Qty Price per kit 52600 €92.80P



#### 3/4" Sq. Dr. Composite Body **Air Impact Wrench**

**Expert Quality**, lower noise, low vibration high torque twin hammer action with easy forward and reverse onehand operation. Fitted with rotating air inlet preventing air line tangling. The composite body makes this a lightweight but rugged tool which reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:

... 1200lb-ft (1627Nm) . Ultimate torque ... 5500r/min Free speed ... 90psi (6.2bar) Operating air pressure Average air consumption ... 6cfm (170L/min) ... 3/8" I.D Minimum hose size ... 1/2" BSP Air inlet Weight ... 3.4kg

Stock No. Box Qty Price each 48413 €411.25P



#### 3/4" Sq. Dr. Air Impact Wrench

Powerful heavy duty impact wrench with one hand easy forward and reverse direction change. Ideal for heavy duty industrial and commercial work. Display carton.

Specification: ... rocking dog Clutch type ... 25mm Bolt capacity ... 500lb-ft (678Nm) Ultimate torque Operating air pressure ... 90psi (6.2bar) Average air consumption ... 7.0cfm (200L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 4.6kg

Stock No. Box Qty each 55112 €177.73P

# **IMPACT WRENCHES**

#### **SAFETY INFORMATION**

Only black finish impact sockets specifically made for the purpose should be used with impact tools. Chrome plated or normal sockets are designed with a thinner socket wall for improved access to fixings and are not designed to cope with the stresses caused by the force of an impact wrench and may shatter, resulting in personal injury.







# 1" Sq. Dr. Twin Hammer Long Nose Air Impact Wrench

Expert Quality, lower noise, lower vibration, three forward and reverse speeds ideally suited for heavy duty and industrial applications. Ergonomic design with twin hammer action, support handle for user comfort and 185mm long extended anvil. Display carton.

Specification:

Ultimate torque ... 1800lb-ft (2441Nm)
Free speed ... 6000r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 10cm (283L/min)
Minimum hose size ... 1/2" I.D

Minimum hose size ... 1/2" I.D Air inlet ... 1/2" BSP Weight ... 7.2kg

Stock	Box Price
No.	Qty each
22412	- €817.00P



#### 1" Sq. Dr. Air Impact Wrench

Powerful heavy duty impact wrench ruggedly built for commercial use. Easy forward and reverse direction change and hammer action to handle difficult jobs. Carton packed.

Specification:

Clutch type ... rocking dog Bolt capacity ... 38mm

Ultimate torque ... 1100lb-ft (1492Nm)
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 12.0cfm (340L/min)

Minimum hose size ... 1/2" I.D.
Air inlet ... 1/2" BSP
Weight ... 12.6kg

 Stock
 Box Qty
 Price quy

 21661
 - €420.08P





#### **AIR TOOL OIL**

Quality air tool oil for use with most air tools is shown on page 581.



# Can't find what you're looking for?

To make locating the air tool you need easier, we have put all the products in this section in special sub-categories (see below).

Don't forget, you can also search using the alphabetical index on pages 830-842 or the unique five-figure Stock No. index - on pages 794-829.

555-560 compressors 561-563 impact wrenches 564-565 air ratchets

566 air drills / screwdrivers

567-569 air sanders 569 air polishers 570 air grinders571 air die grinders

572-578 air tools and spray guns

579-580 air hoses 581-585 air line fittings







#### 1/4" Sq. Dr. Stubby Composite **Body Air Ratchet**

Expert Quality, lower noise, low vibration, low weight with silenced motor outlet for maximum user comfort. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:

... 30lb-ft (41Nm) Ultimate torque ... 350r/min Free speed Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet ... 400g Weight

Box Qty Stock No. each 14199 €132.15P



#### 3/8" Sq. Dr. Air Ratchet

Ratchet ideal for most applications in the automotive workshop. Display carton.

Specification:

... 50lb-ft (68Nm) Ultimate torque Free speed ... 150r/min Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet

Stock No. Box Qty Price each 52603 €48.75P

... 1.1kg

#### (DRAPER) Expert









#### 2 5218PRO

#### 3/8" Sq. Dr. Stubby Composite **Body Air Ratchet**

**Expert Quality**, lower noise, low vibration, low weight with wobble anvil and silenced motor outlet for maximum user comfort. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:

Weight

Ultimate torque ... 30lb-ft (41Nm) ... 350r/min Free speed Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet

Stock No. Price Qty each 14210 €132.15P

... 400a

3 5224PRO

#### 3/8" Sq. Dr. Soft Grip Air Ratchet


**Expert Quality**, lower noise, low vibration, soft grip ratchet designed for the professional user. Rear rotating exhaust for user comfort. Rotating air inlet to prevent air lines tangling. Rubber boot around ratchet head to minimise in use damage. Display carton.

Specification:

Ultimate torque ... 50lb-ft (68Nm) ... 150r/min Free speed Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet Weight ... 1.2ka

Stock Price Qty No. each 47568 €89.70P





## 5 4204BK

#### 15 piece 3/8" Sq. Dr. Air Ratchet Kit

Ratchet ideal for most applications in the automotive workshop and is suitable for radiator, fuel pump and spark plug removal. Supplied complete in carrying case. Display carton.

- Contents: · reversible ratchet
- 7 chrome vanadium impact sockets size: 10, 11, 12, 13, 14, 17 and 19mm
- extension bar size: 75mm
- 3 impact screwdriver bits size: 6, 7mm plain slot and No.2 cross slot
- · universal joint
- · oil pot
- 1/4" BSP nipple

Specification: Free speed

... 150r/min Average air consumption ... 4.0cfm (114L/min) Weight ... 1.1kg (machine only)

Stock Price per kit €69.28P 52604

Weight

#### **DAVE SAYS**

This new impact ratchet has a built-in impact clutch - giving 50% more torque than our standard Expert air ratchet. This means faster strip-down on stubborn rusted or



painted fixings and no "kick-back" through the wrench when the fixing hits home.









#### 5296-PRO

# 1/2" Sq. Dr. High Torque Impact Ratchet

Expert Quality, unique impact ratchet with pin clutch mechanism allowing three times faster and twice the torque of a standard ratchet with no 'kickback' torque reaction. Lower noise, lower vibration, soft grip ergonomic design ideal for the professional user. Rotating exhaust and air inlet prevent air lines tangling. Hardened ratchet housing for longer life. Display carton.

Specification:

Ultimate torque ... 75lb-ft (102Nm)
Free speed ... 400r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4.0cfm (114L/min)
Minimum hose size ... 3/8" I.D

Air inlet ... 1/4" BSP Weight ... 1.2kg


 Stock No.
 Box Qty
 Price each

 22413
 - €162.33P

#### **AIR LINE FITTINGS**

AIR TOOL HOSES AND FITTINGS A complete range of air tool hoses and fittings is shown on pages 579-585



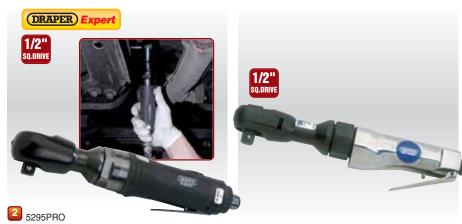

#### 1/2" Sq. Dr. Soft Grip Air Ratchet

**Expert Quality**, lower noise, low vibration, soft grip ratchet designed for the professional user. Rear rotating exhaust for user comfort. Rotating air inlet to prevent air lines tangling. Hardened ratchet housing for long life. Display carton.

Specification:

Ultimate torque ... 50lb-ft (68Nm)
Free speed ... 150r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4.0cfm (114L/min)
Minimum hose size ... 3/8" I.D
Air inlet ... 1/4" BSP
Weight ... 1.2kg

 Stock No.
 Box Qty
 Price each

 41099
 €92.80P

#### 3 4295B

#### 1/2" Sq. Dr. Air Ratchet

Ratchet for most applications in the automotive workshop and is ideal for radiator, fuel pump and spark plug removal. Durable all steel head. Display carton.

Specification:

Ultimate torque ... 50lb-ft (68Nm)
Free speed ... 150r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption
Minimum hose size ... 3/8" I.D
Air inlet ... 1/4" BSP
Weight ... 1.1kg

 Stock No.
 Box Qty
 Price each

 52601
 - €51.98P

# **QUALITY AIR RATCHETS AND AIR RATCHET KITS**





#### 4295BK

#### 16 piece 1/2" Sq. Dr. Air Ratchet Kit

Ratchet ideal for most applications in the automotive workshop and is suitable for radiator, fuel pump and spark plug removal. Supplied complete in carrying case. Display carton.

Contents:

- reversible ratchet
- 7 chrome vanadium impact sockets size: 9, 10, 11, 13, 14, 17 and 19mm
- extension bar size: 75mm
- 3 impact screwdriver bits size: 6, 7mm plain slot and No.2 cross slot
- universal joint oil pot 1/4" BSP nipple

Specification:

Free speed ... 150r/min
Average air consumption ... 4.0cfm (114L/min)
Weight ... 1.1kg (machine only)

 Stock No.
 Box Qty
 Price per kit

 52602
 \$69.28P



#### Composite Body Soft Grip Reversible Air Drill with 10mm Keyless Chuck

Expert Quality, lower noise, low vibration soft grip workshop air drill. Lightweight and powerful with a reversing facility, planetary gear system, variable speed trigger and Jacobs keyless chuck. Rotating air inlet to prevent air lines tangling. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:
Spindle thread ... 3/8" x 24 tpi
Free speed ... 1800r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4.0cfm (114L/min)

Minimum hose size ... 3/8" I.D Air inlet ... 1/4" BSP Weight ... 1.1kg

 Stock No.
 Box Qty
 Price each

 14258
 - €103.85P



#### Reversible Air Drill with 10mm Keyless Chuck

Ideal for general workshop duties. Equipped with reversing facility, ergonomic soft grip handle and Jacobs keyless chuck. Display carton. Specification:

Spindle thread ... 3/8" x 24 tpi
Free speed ... 1800r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4.0cfm (114L/min)
Minimum hose size ... 3/8" I.D
Air inlet ... 1/4" BSP

 Weight
 ... 1.1kg

 Stock No.
 Box Qty
 Price each

 28830
 - €67.50P



#### Reversible Air Drill with 10mm Geared Chuck

For general drilling work in workshops. Lightweight and powerful with a reversing facility and Jacobs geared chuck and key. Display carton. Specification:

Spindle thread ... 3/8" x 24 tpi
Free speed ... 1800r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption
Minimum hose size
Air inlet ... 1/4" BSP
Weight ... 1.1kg

 Stock No.
 Box Qty
 Price each

 28829
 - €66.58P



#### Composite Body Soft Grip Reversible Air Drill with 13mm Keyless Chuck

Expert Quality, lower noise, low vibration soft grip workshop air drill. Lightweight and powerful with a reversing facility, planetary gear system, variable speed trigger, side handle and Jacobs keyless chuck. Rotating air inlet to prevent air lines tangling. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton. Specification:

Spendation.

Spindle thread ... 3/8" x 24 tpi
Free speed ... 800r/min
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4.0cfm (114L/min)
Minimum hose size ... 3/8" I.D
Air inlet ... 1/4" BSP

 Stock
 Box Qty
 Price each

 14266
 - €146.30P

... 1.3kg





Weight

Jacobs

Weight

#### Air Drill with 13mm Keyless Chuck

Powerful drill ideal for demanding workshop duties. Equipped with adjustable side handle, ergonomic soft grip handle and Jacobs keyless chuck. Display carton. Specification:

Specification:

Spindle thread ... 3/8" x 24 tpi

Free speed ... 800r/min

Operating air pressure ... 90psi (6.2bar)

Average air consumption ... 4.0cfm (114L/min)

Minimum hose size ... 3/8" I.D

Air inlet ... 1/4" BSP

 Stock No.
 Box Qty
 Price each

 28831
 - €124.86P

... 1.4kg



#### Composite Body In-Line Air Screwdriver

Expert Quality, lower noise, low vibration workshop air screwdriver. Lightweight and powerful with a reversing facility, planetary gear system, quick change chuck and suspension loop. Externally adjustable cushion clutch for precise tightening torque. Silenced motor outlet for maximum user comfort. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:
Hexagon drive ... 1/4"
Free speed ... 1800r/min

Torque ... 10-90lb-in (1.13-10.17Nm)
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4cfm (114L/min)

Minimum hose size ... 3/8" I.D Air inlet ... 1/4" BSP Weight ... 1.2kg

 Stock
 Box Qty
 Price each

 14197
 - €191.90P



#### Composite Body Soft Grip Air Screwdriver

Expert Quality, lower noise, low vibration workshop air screwdriver. Lightweight and powerful with a reversing facility, planetary gear system and quick change chuck. Silenced motor outlet for maximum user comfort. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Display carton.

Specification:
Hex. drive ... 1/4"
Free speed ... 1800r/min

Torque ... 10-90lb-in (1.13-10.17Nm)
Operating air pressure ... 90psi (6.2bar)
Average air consumption ... 4cfm (114L/min)

Average air consumption ... 4cfm (114 Minimum hose size ... 3/8" I.D Air inlet ... 1/4" BSP Weight ... 1.3kg

 Stock No.
 Box Qty
 Price each

 14193
 - €152.60P





#### 150mm Composite Body Geardrive Sander

Expert Quality, low speed/high torque gear drive mechanism ensures high stock removal with minimum surface heat, ideal for modern paint finishes. Suitable for use with centralized dust extraction system. Display carton

Specification:

Pad size ... 150mm ... 5/16" x 24 Spindle size Orbit diameter ... 5mm ... 900 r/min Free speed ... 90psi (6.2bar) Operating air pressure ... 3.5cfm (100L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 1.9kg

Stock No. Price each 22417 €340.95P

#### 150mm Composite Body Dual Action Oil-Free Air Sander

**Expert Quality**, lower noise, lower vibration, low weight with soft grip handle. Standard pattern six hole hook and loop base plate. Ideal for working on body filler and smooth/contoured surfaces. The composite body with its oil-free motor makes for a lightweight but rugged tool ideal for the body-shop environment. Suitable for use with centralized dust extraction system. Display carton.

Specification:

Weight

Pad size ... 150mm ... 5/16" x 24 Spindle size ... 5mm Orbit diameter ... 12,000 Orbits per minute ... 90psi (6.2bar) Operating air pressure ... 2.0cfm (56L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet

Stock No. Box Qty Price each 22415 €204.60P

... 0.7kg



5 4209A

#### 150mm Dual Action Air Sander

Suited for finishing body filler and working on contoured surfaces. Has built in throttle safety lever and variable speed control. Display carton.

Specification:

Pad size ... 150mm Spindle size ... 5/16" x 24 tpi Orbit diameter ... 10mm ... 10,000 Orbits per minute ... 90psi (6.2bar) Operating air pressure ... 4.0cfm (114L/min) Average air consumption ... 0.4HP Motor power ... 3/8" I.D Minimum hose size Air inlet ... 1/4" BSP ... 2.6kg Weight

Stock No.	Part No.		3ox Qty	Price each
56092	4209A	Sander	-	€56.65P
29677	A4209D	Backing Pad	-	€29.30D





#### 150mm Composite Body Dual Action Soft Grip Sander

Expert Quality, lower noise, low vibration, low weight with soft grip handle. One or two handed operation due to double action control lever. Suitable for use with centralized dust extraction vacuum system. Ideal for working on body filler and contoured surfaces. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink'. Display carton.

Specification:

Weight

... 150mm Pad size ... 5/16" x 24 Spindle size Orbit diameter ... 5mm Orbits per minute ... 10,000 Operating air pressure ... 90psi (6.2bar) Average air consumption ... 3.0cfm (85L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet

Stock No.		Price each
47622	- €239	9.08P

... 1kg

#### 150mm Dual Action Dust-Free Air Sander

Ideal for finishing body filler and working on contoured surfaces. This dual action sander has a variable speed control and dust extraction exhaust. Carton packed.

Specification:

Pad size ... 150mm ... 12,000r/min Free speed ... 90psi (6.2bar) Operating air pressure ... 5.0cfm (142L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet ... 0.7kg Weight

Stock No.	Bo Qt	
28832	_	€162.00P





#### Pack of 10 Assorted 150mm **Aluminium Oxide Sanding Discs**

Pack comprises 3 x 80, 4 x 180, 23 x 320. Packed 10 discs per pack.

Order number of packs required. (10 discs per pack)

Stock	Box	Price
No.	Qty	p/pack
23669	-	€11.43D



#### 150mm Self Adhesive White **Aluminium Oxide Sanding Discs**

A superior fast cutting abrasive for surface preparation in metal fabrication and automotive refinishing workshops. Assorted pack comprises 2 x 40, 1 x 80, 1 x 180 and 1 x 320 grit grades.

Packed five discs per pack.

Order number of packs required. (5 discs per pack)

Stock No.	Grit Grade	Box Qty	Price p/pack
23371	80	_	€5.50D
23372	120	_	€5.50D
23374	180	_	€5.50D
23375	240	_	€5.50D
23376	320	_	€5.50D
23378	Assorted	-	€5.50D





#### 175mm Air Angle Sander

Ideal for removing rust and filler. With built in speed regulator to ensure a constant control. Incorporates an auto release lever throttle, with left or right fitting handle. Carton packed.

Specification:	
Pad size	175mm
Free speed	4500r/min
Spindle	5/8" x 11 tpi
Operating air pressure	90psi (6.2bar)
Average air consumption	4.2cfm (119L/min)
Minimum hose size	3/8" I.D
Air inlet	1/4" BSP
Weight	2kg

Stock Part No. No.	Description	Box Price Qty each
22321 4257	Sander	- €143.15P
25141 A4237/57	Backing Pad	- €8.68D





#### 50/75mm Compact Dual Action Soft Grip Air Sander Kit

Expert Quality, lower noise. low vibration, low weight compact sander ideal for small scale surface repairs and intricate items. Gives high quality finish. Soft grip handle for user comfort. Supplied in carrying case.

Contents: • Sander • 50mm backing pad • 75mm backing pad • 30 x 50mm assorted grit hook and loop sanding discs • 30 x 75mm assorted grit hook and loop sanding discs • Spindle lock pin

Specification:

Specification:	
Pad sizes	50 and 75mm
Orbits per minute	10,000
Orbit diameter	5mm
Operating air pressure	90psi (6.2bar)
Average air consumption	4.0cfm (113L/min)
Minimum hose size	3/8" I.D
Air inlet	1/4" BSP

... 0.6kg Weight Stock No. Price per kit

- €138.45P 47617



#### **Aluminium Oxide Sanding Discs**

50 and 75mm, for use with the Draper Compact Dual Action Soft Grip Air Sander Kit Stock No. 47617.

#### Packed 10 sheets per pack.

Order number of packs required. (10 sheets per pack)

Stock	Part	Diameter	Grit	Box Price
No.	No.		Grade	Qty p/pack
48201	AAT04	50mm	320	<ul><li>€10.75D</li><li>€5.45D</li><li>€5.45D</li></ul>
48202	AAT05	50mm	400	
48203	AAT06	50mm	600	
48205	AAT07	75mm	320	- €10.75D
48206	AAT08	75mm	400	- €10.75D
48207	AAT09	75mm	600	- €10.75D





#### **DAVE SAYS**

Our air tools, like your car, are precision manufactured, therefore they require oil to lubricate and cool them.

They should be supplied with a filtered air supply from which the inevitable condensed water has been removed. This will ensure long and trouble free operation.

See page 585 to order filters, regulators and





#### **Orbital Air Sander 1/3 Sheet**

Flat bed orbital sander with automatic release trigger and restrictor is ideal for sanding on flat autobody panels and other sanding applications. The preset speed control and quiet motor ensures maximum operator efficiency. Ideal for sanding wood, metal, plastic, fibreglass sheet and body fillers. Carton packed.

Specification:

Pad size	92 x 170mm
Sanding sheet size	92 x 232mm
Free speed	8000 opm
Operating air pressure	90psi (6.2bar)
Average air consumption	5.0cfm (142L/min)
Motor power	0.5HP
Minimum hose size	3/8" I.D
Air inlet	1/4" BSP
Weight	2kg

Stock Price Qty each 19897 €56.65P





#### 92 x 232mm Aluminium Oxide


# **Sanding Sheets**

For most 1/3 sheet sanders. Assorted pack comprises 3 x 60, 4 x 80 and 3 x 120 grit grades.

Packed 10 sheets per pack.

Order number of packs required. (10 sheets per pack)

No.	Grade	Qty	p/pack
59464	60	-	€3.55D
59465	80	_	€3.50D
59466	100	-	€3.43D
59467	120	-	€3.43D
59463	Assorted	-	€3.55D



# **AIR SANDERS & POLISHERS**



#### **Heavy Duty Compact Air Belt Sander**

For shaping and finishing work. Ideal for awkward angles/shapes on bodywork. Supplied with two sanding/grinding belts. Display carton.

Specification:

. Belt size ... 20 x 520mm ... 90psi (6.2bar) Operating air pressure ... 18.4cfm (524L/min) Average air consumption 16,000r/min Free speed Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet size Weight ... 1.4kg

Stock No.	Box Qty	Price each
61025	_	€217.05P

#### Compact Air Belt Sander

For shaping and finishing work. Ideal for awkward angles/shapes on bodywork. Carton packed.

Specification: . Belt size

... 90psi (6.2bar) Operating air pressure ... 7.0cfm (199L/min) Average air consumption ... 16,000r/min Free speed Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet size Weight ... 0.8kg

Stock No.	Box Qty	Price each
52605	- +	£132.15P

... 10 x 330mm



#### 175mm Air Angle Polisher

Ideal for heavy buffing and polishing. Complete with a built-in regulator to ensure a constant speed under heavy loads. Carton packed.

Specification:

... 175mm Disc size ... 5/8" UNF Spindle size Free speed ... 2500r/min ... 90psi 6.2bar Operating air pressure ... 12cfm (342L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 2ka

Stock Part No. No.	Description	Box Qty	Price each
58013 4237A	Angle Polisher	- €1	25.88P
25141 A4237/57	Backing Pad	_	€8 68D





#### 20 x 520mm Aluminium Oxide Sanding Belts

Cloth backed. For use with Draper Compact Air Belt Sander Stock No. 61025 and other manufacturers similar machines. Sold loose.

Stock No.	Grit Grade	Box Qty	Price each
61240	40	_	€2.40D
61241	60	_	€2.40D
61242	80	_	€2.40D
61243	120	_	€2.40D



#### 10 x 330mm Aluminium Oxide Sanding Belts

Cloth backed. For use with Draper Compact Belt Sander Stock No. 52605 and other manufacturers similar machines. Sold loose.

Grit Grade	Box Qty	Price each
40	_	€2.00D
60	_	€2.00D
80	_	€2.00D
120	_	€2.00D
	<b>Grade</b> 40 60 80	Grade Qty 40 - 60 - 80 -

#### **POLISHING BONNETS**

A selection of polishing bonnets can be found



# **POLISHER KIT**



#### 75mm Compact Soft Grip Air Polisher Kit

**Expert Quality**, for small scale surface polishing. Soft grip handle for user comfort. Comprises pads and polishing bonnets. Supplied in carrying case. Contents:

#### Polisher

- 75mm polishing bonnet
- 2 off 85 x 30mm foam compounding pads
- 75mm backing pad
- · spindle lock spanner

Specification:

... 75mm Pad size Speed (no load) ... 2500r/min Operating air pressure ... 90psi (6.2bar) ... 4.0cfm (114L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight 0.6kg

g	0.0.19
Stock No.	Box Price Qty per kit
47616	- €138.45P







**Sponges** For use with the Draper Compact Soft Grip Air Polisher Kit Stock No.47616. Hook and loop fixing.

Stock No.	Part No.	Colour	Box Qty	Price each
	AAT01	White-fine	-	€21.98D
48199	AAT02	Yellow-coarse		€21.85D



#### Lambswool **Polishing Bonnet**

For use with the Draper Compact Soft Grip Air Polisher Kit Stock No.47616. Hook and loop fixing. Sold loose

Stock No.	Box Qty	Price each
48200	_	€21.85D



#### 115mm Composite Body Air Angle Grinder

Expert Quality, lower noise, low vibration angle grinder with steel throttle lever with safety lock off. Spindle lock for easy disc change. The composite body makes this a lightweight but rugged tool that reduces operator fatigue and the 'cold sink' effect. Supplied with side handle. Display carton.

Specification:

Disc size ... 115mm Spindle thread ... M14 ... 12,000r/min Speed (no load) Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D ... 1/4" BSP Air inlet Weight ... 2kg

Stock No.	Box Qty	Price each
47572	_	€220.23P





#### 100mm Air Angle Grinder

Powerful, aluminium construction angle grinder is complete with throttle safety lever, safety guard and side handle. Display carton.

Specification:

Disc size ... 100 x 6mm Motor ... 0.9HP Spindle ... 3/8" UNF ... 11,000r/min Free speed ... 90psi (6.2bar) Operating air pressure ... 6.0cfm (170L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 2kg

Stock Part No. No.	Description	Box Qty	Price each
19896 4207	Angle Grinder	- €1	19.55P
27940 A4207P	Backing Pad	– €	14.20D



#### (DRAPER) Expert 3 5225PRO **50mm Compact** Air Angle Grinder Kit

Expert Quality, lower noise, low vibration, low weight with variable speed motor and steel throttle lever with sprung safety lock-off. Supplied with four grinding wheels. Carton packed. Specification:

... 50mm Disc size ... 3/8 x UNF Spindle thread ... 20,000r/min Speed (no load) Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size Air inlet ... 1/4" BSP Weight ... 750g

Price per kit Stock 47570 €135.30P



#### 50mm Depressed Centre Metal **Grinding Wheels**

Resinoid bonded aluminium oxide, maximum working speed 50m/sec. For use with the Compact Air Angle Grinder Kit Stock No. 47570. Sold loose.

Stock No.	Part No.	Grade	Box Qty	Price each
48208	AAT10	A60-Q-BF	_	€5.53D
48209	AAT11	A80-Q-BF	_	€5.53D
48210	AAT12	A120-Q-BF	-	€5.53D



#### (DRAPER) Expert



#### 5226PRO

#### 75mm Soft Grip Reversible Air Cut-Off Tool

Manufactured to EN 12413 Specifications

Expert Quality, with patented reversible mechanism to protect workpiece from sparks. Designed for cutting auto body panels or light sheet metal. Low noise/ low vibration; variable speed motor; rotating air inlet to prevent air line tangle and steel throttle lever with sprung safety lock-off. Particularly suitable for use in confined working spaces on autobody repair work. Display carton. Specification:

Disc size ... 75 x 1.6mm ... 18,000r/min Free speed Operating air pressure ... 90psi (6.2bar) ... 4.0cfm (114L/min) Average air consumption ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 900g

Stock No.	Part No.	Description	Box Qty	Price each
47569	5226PRO	Cut-Off Tool	-	€102.25P
31384	CWMF2B	75x10mm C/Wheel	-	€1.35D



#### 75mm Air Cut-Off Tool

Manufactured to EN 12413 Specifications

Versatile machine especially designed for cutting auto body panels or light sheet metal. It incorporates a safety lever throttle switch. Particularly suitable for use in confined working spaces on autobody repair work. Display carton.

Specification:

Disc size ... 75 x 1.6mm ... 22,000r/min Free speed ... 90psi (6.2bar) Operating air pressure Average air consumption ... 4.5cfm (129L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 0.9kg

Stock No.	Part No.	Description	Box Qty	Price each
54631	4212A	Cut-Off Tool	-	€45.65P
31384	CWMF2B	75x10mm C/Wheel	-	€1.35D

#### (DRAPER) Expert



#### 1 5221PRO

#### 6mm Compact Soft Grip Air Angle Die Grinder

Expert Quality, lower noise, low vibration, low weight, ideal for grinding and polishing metal components such as cylinder heads, valve ports and small industrial components. Variable speed motor; rotating air inlet to prevent air line tangle and steel throttle lever with sprung safety lock-off. Display carton.

Specification:

Free speed ... 25,000r/min Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weiaht ... 540g

Stock Price No. each 47565 €62.93P

#### (DRAPER) Expert



#### 220PRO

#### 6mm Compact Soft Grip Air Angle Die Grinder with 115° head

Expert Quality, lower noise, low vibration, low weight, ideal for grinding and polishing metal components such as cylinder heads, valve ports and small industrial components. Variable speed motor, 115 $^{\circ}$  head for access to awkward locations; rotating air inlet to prevent air line tangle and steel throttle lever with sprung safety lock-off. Display carton.

Specification:

... 20,000r/min Free speed Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 640a

Stock Box Qty No. 47564 €94.40P





#### 3 5222PRO

#### 6mm Soft Grip Die Grinder

Expert Quality, low noise, low vibration, ideal for grinding and polishing metal components such as cylinder heads, valve ports and small industrial components. Variable speed motor; rotating air inlet to prevent air line tangle and steel throttle lever with sprung safety lock-off. Display carton.

Specification:

... 20,000r/min Free speed Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet Weight ... 700a

Stock No.	Box Qty	Price each
47566	_	€78.68P



#### **DAVE SAYS**

When operating a die grinder always wear approved eye or face protection and if fumes pose a hazard, use the correct breathing protection in accordance with

COSHH regulations.

You can find our complete range of PPE clothing on pages 457-468.

QUALITY MAKES DIFFERENCE

For safe working practice keep hands and body clear of the work piece when operating die grinders and secure unstable work with a clamp, vice or other adequate holding device.



# 4247A

#### 1/4" Air Angle Die Grinder

Ideal for grinding and polishing metal components such as cylinder heads, valve ports and small industrial components. Display carton.

Specification:

Free speed ... 20,000r/min Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet 0.5kg Weight

	ololig			
Stock No.	Description	Box Qty	Price each	
38147	Die Grinder	-	€72.40P	
27941	6mm Collet	-	€12.40D	
27942	3mm Collet	_	€12.40D	
21831	1/8" Collet	_	€12 40D	



#### 15 piece 1/4" Air Die Grinder Kit

Industrial machine giving complete flexibility for most grinding needs. Ideal for grinding and polishing metal components. Supplied complete in carrying case. Display carton.

#### Contents:

- die grinder complete with 1/4" collet and safety trigger
- 5 mounted points with 1/4" diameter shanks
- 5 mounted points with 1/8" diameter shanks
- 1 x 1/8" collet
- 1/4" BSP nipple
- 2 spanners

Specification - air die grinder:

... 20,000r/min Free speed Operating air pressure ... 90psi (6.2bar) ... 8.0cfm (227L/min) Average air consumption Minimum hose size ... 3/8" I.D Air inlet ... 1/4" BSP

Weight (die grinder only) ... 1.32kg
All collet and shank diameters are true imperial sizes.

Stock No.	Description	Box Qty	Price per kit
20556	Die Grinder Kit	-	€47.25P
27942	3mm Collet	_	€12.40D
27941	6mm Collet	_	€12.40D
21831	1/8" Collet	-	€12.40D



**AIR TOOLS** section 11





#### Air Nibbler

Quality diecast construction. Punch head has four way entry for forward, right, left and reverse operation. Carton packed.

Specification:

... 18 gauge in steel Cutting capacity ... 2100 Strokes per minute

Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) ... 3/8" I.D Minimum hose size ... 1/4" BSP Air inlet

Weight  $\dots$  1kg This machine has a minimum cutting radius of 6mm.

		3	
Stock No.	Description	Box Qty	Price each
27639	Nibbler	-	€88.10P
27831	Punch	-	€14.23D
27834	Die	_	€37.90D





#### **Chisel Retaining Spring**

For use with air hammers. Display packed.

Stock No.	Box Qty	Price each
22315	-	€5.20P





#### **Air Hammer Kit**

General purpose short stroke hammer kit comprising a full range of accessories including panel cutter, rivet cutter, bush splitter, spot weld splitter and piercing cutter. Other individual cutters are available separately. Supplied complete in carrying case. Display carton.

#### Contents:

- air hammer
- 5 chisels
- chisel retaining spring · oil pot
- 1/4" BSP nipple Specification - air hammer: Chisel shank opening

... 10.18mm ... 3000 Blows per minute ... 66.6mm Stroke length Operating air pressure ... 90psi (6.2bar) Average air consumption ... 4.0cfm (114L/min) Minimum hose size ... 3/8" I.D

... 1/4" BSP Air inlet Weight (hammer only) ... 2 kg

Stock	Box	Price
No.	Qty	per kit
57676	- +	€48.75P





AIR TOOL HOSES AND FITTINGS A complete range of air tool hoses and fittings is shown on pages 579-585.



#### **Chisels and Chisel Set**

For use with Stock Nos.57676 and 79564 as well as other manufacturers similar air hammers. Shank 10.18mm. All chisels must be used with a chisel retaining spring, Stock No.22315. Display packed.

Stock No.	Description	Box Qty	Price each
57800	Tailpipe Cutter Chisel	-	€4.20D
57801	Spot Weld Breaker Chisel	-	€4.20D
57802	Taper Punch	-	€4.20D
57803	Ripping Chisel	-	€4.20D
57804	Panel Cutting Chisel	-	€4.20D
59083	Metal Flanging Attachment	-	€41.13D

## **WELDING & CUTTING TOOLS**

See pages 540-546 for our collection of ARC, MIG and TIG welders and accessories.

We also have plasma cutters and stud welders for the body shop.

